



# Smart Camera User Manual



## 1. Download the APP


Search for Omkii Smart in APP store or Google Play or Scan the QR Code below to download.



## 2. Register/Log in with existing account

### 2.1. Register


If you don't have account yet you can register an account. Click "Create New Account" and read the Privacy Policy on APP, click agree to enter the registration page for Mobile or Email address to get the verify code to finish the registration.

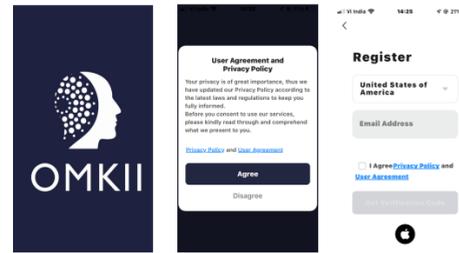

### 2.2. Login with existing account

If you already have an account click "Log in with existing account" (1) The system automatically select the currently Country/Region or you could manually select the Country/Region.

(2) Enter your registered mobile number or email address, enter the password to log in the APP.

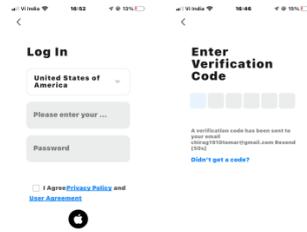


## 3. Add devices


### 3.1. QR Code Connection

Tips: The devices only support 2.4GHz wifi currently not 5GHz wifi. And the WiFi password should not contain any special characters eg. !@#%&\*() when configuring please put your phone and devices as closer as possible.

Power on the camera, you will hear the broadcast "Wait for wifi configure" If you heard nothing at all kindly reset the camera to factory settings.

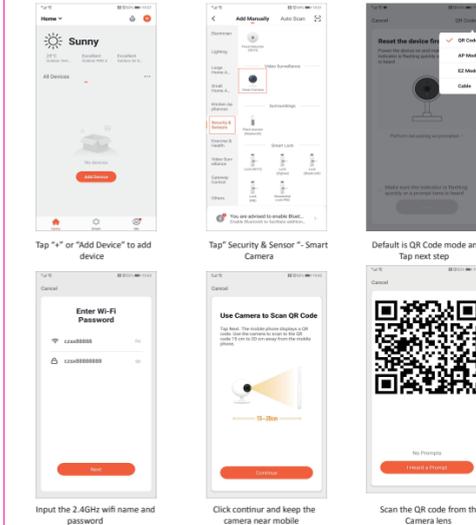


### 3.2. EZ Mode Connection

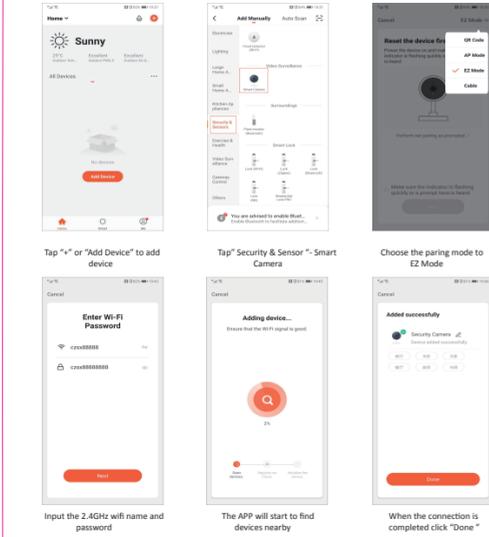


### 3.3. Cable Mode

Power on the camera and connect the camera with a network cable, waiting for the LED signal light is on.

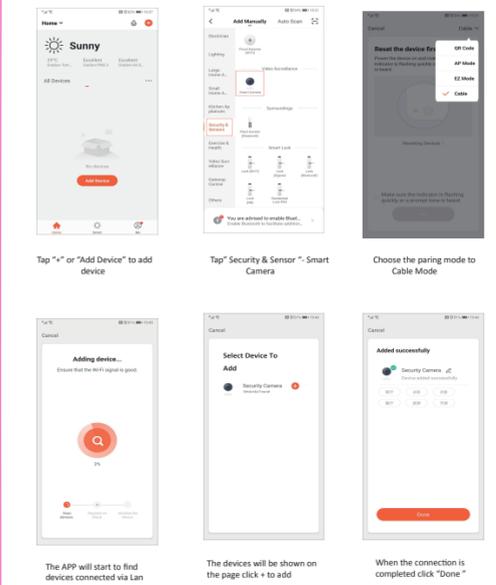


## 4. APP Settings

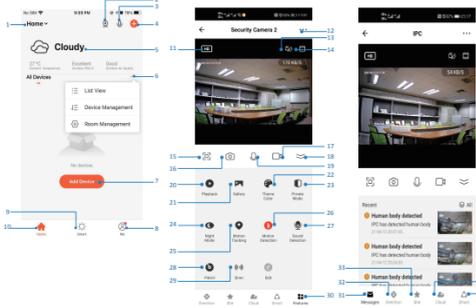


1. Family Management
2. Camera Multiview
3. Select contact entrance
4. Add a new device
5. Local information
6. Display management
7. Add a device first time
8. MIP (Personal Information Home Management, Motion Detection Message Center, SDQ, Feedback More Services, Settings)
9. Smart Scene with conditions or other Omkii smart devices like alarm light, controller, etc.
10. Home device list
11. SD/HD switch
12. Camera settings
13. Sound option (Speaker) open hearing
14. Vertical Full Screen
15. Horizontal Full Screen
16. Camera snapshot (save image on phone)
17. Actually record record video on phone
18. Collapse the menu
19. Talk button (Press to talk to the camera)
20. Playback the recordings
21. Photo album
22. Theme color (light mode and dark mode)
23. Private mode (Camera display turn off on app)
24. Night Mode (Smart Mode: lit on night when motion happens white light on Infrared Mode: only IR works, Color light Mode: White light always on)
25. Enable Auto tracking to follow the movement
26. Motion detection alarm (Send alarm notification if any movement detected)
27. Sound Detection (Send alarm notification if any sound detected)
28. Patrol (Panorama) patrol to move every angle. Site Patrol will patrol all sites and stay at each sites for 10s)
29. Siren alarm (To make alarm sound to scare the suspicious person)
30. Camera features page
31. Message (Alarm message page to show when there is motion or sound detected)
32. Direction (To control camera directions)
33. Site (Presets can be stored max 60s. When you click the site the camera will move to the place automatically)
34. Cloud Service (Offer by Omkii with AWS Cloud service to record videos on cloud)
35. Smart (Different from home page, this smart is to set only camera smart actions)

## 5. Camera Settings

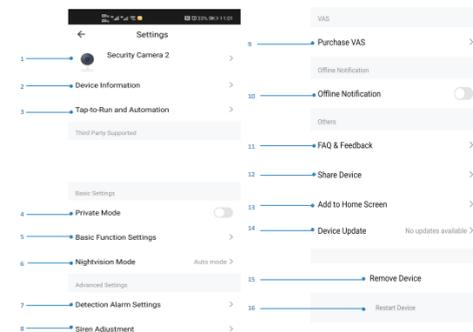

1. Camera name you can edit by yourself the name and change the ICON and set location
2. Device information include owner IP address, Device ID, Time Zone, WiFi Strength
3. Tap to run the scenes or automations created
4. Private Mode (Turn off the camera display on app)
5. Purchase VAS
6. Offline Notification
7. FAQ & Feedback
8. Share Device
9. Add to Home Screen
10. Device Update
11. Remove Device
12. Restart Device

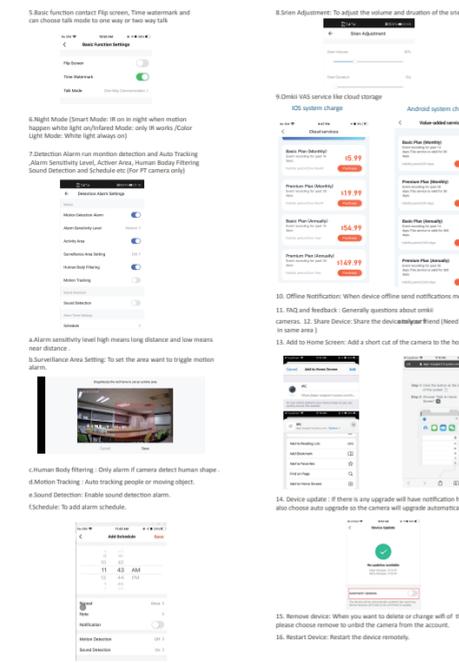

## 6. FAQ

As mentioned that in the camera settings there are FAQ page and you could also read the Q&A below to have a brief understanding of the common issues.

Q1: How do I reset my camera to factory settings?  
A1: Delete the camera from your app list directly or long press the reset button for 8s until you hear the voice "Reset, camera reboot"

Q2: I have selected the 2.4GHz Wi-Fi and input password correctly why does the camera still not connected to Wi-Fi?  
A2: (1) Please make sure the network you used is the same one for your phone and the camera.  
(2) Please make sure your Router enable DHCP you could login the router settings to check. If it's disabled the camera will not get IP and fail.  
(3) Please press the reset button for 8s to restart the camera.  
(4) Please make sure the Wifi signal intensity is over 80%.

Q3: How do I change the camera from one router to another?  
A3: First delete the camera from your app list or long press the reset button for 8s. Then configure the camera again.

Q4: Why SD card can't be recognized? After a period the video and cycle videos can not be recorded?  
A4: Please check the camera settings and make sure you set up the camera to record on SD card. And currently support 128GB SD card do not exceed. And please make sure the SD card is not damaged and support only FAT32.

Q5: Why I can't receive the alarm information when I see device online and has a motion detection event?  
A5: Please make sure you have enabled the push notification from the Omkii Smart APP. And please enable alarm notification on app.

Q6: How do I access the camera on WEB?  
A6: Open the page <https://ipc.ismartlife.me/login> and use your own Omkii app to scan the QR code then you will see the camera on IE.

